


CYNTHIA

disponibile in versione elettrico ed idraulico
available in electric or hydraulic version

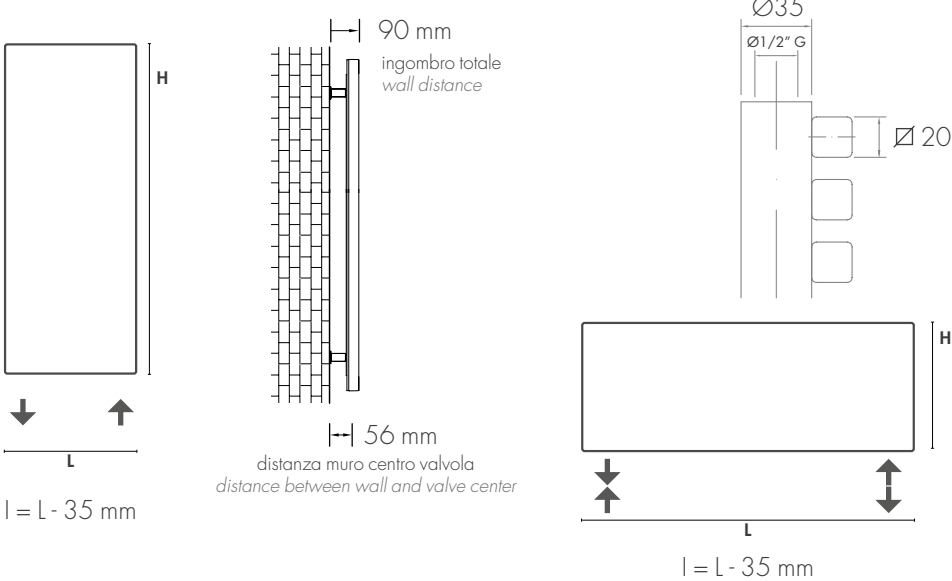

L (mm)	H (mm)	WATT Δ t50	VERSION	MODEL
400	800	441		hydraulic single
400	1200	634		hydraulic single
400	1500	784		hydraulic single
400	1800	952		hydraulic single
500	800	496		hydraulic single
500	1200	706		hydraulic single
500	1500	883		hydraulic single
500	1800	1068		hydraulic single
600	800	554		hydraulic single
600	1200	796		hydraulic single
600	1500	1002		hydraulic single
600	1800	1179		hydraulic single
700	800	614		hydraulic single
700	1200	874		hydraulic single
700	1500	1104		hydraulic single
700	1800	1310		hydraulic single
800	800	669		hydraulic single
800	1200	953		hydraulic single
800	1500	1183		hydraulic single
800	1800	1431		hydraulic single
900	800	727		hydraulic single
900	1200	1036		hydraulic single
900	1500	1297		hydraulic single
900	1800	1548		hydraulic single
1000	800	785		hydraulic single
1000	1200	1119		hydraulic single
1000	1500	1396		hydraulic single
1000	1800	1660		hydraulic single
1200	340	480		hydraulic single

L (mm)	H (mm)	WATT $\Delta t50$	VERSION	MODEL
1200	600	960		hydraulic single
1400	340	520		hydraulic single
1400	600	1040		hydraulic single
1600	340	560		hydraulic single
1600	600	1120		hydraulic single
1800	340	624		hydraulic single
1800	600	1248		hydraulic single
L (mm)	H (mm)	WATT	VERSION	MODEL
500	1500	500		electric BASIC
500	1500	500		electric EASY1
500	1800	750		electric BASIC
500	1800	750		electric EASY1
600	1500	750		electric BASIC
600	1500	750		electric EASY1
600	1800	1000		electric BASIC
600	1800	1000		electric EASY1

BASIC



Resistenza in classe II.
Resistance in class II.

EASY 1



La versione EASY 1 elettrica.
The EASY 1 electric version includes.



Colori **FEEL** // Color **FEEL**



per richiedere altri interessi o misure personalizzate contattare
ufficio tecnico // for other valves distance or custom dimensions
please contact technical office