


DELIAS

disponibile in versione elettrico ed idraulico
available in electric or hydraulic version

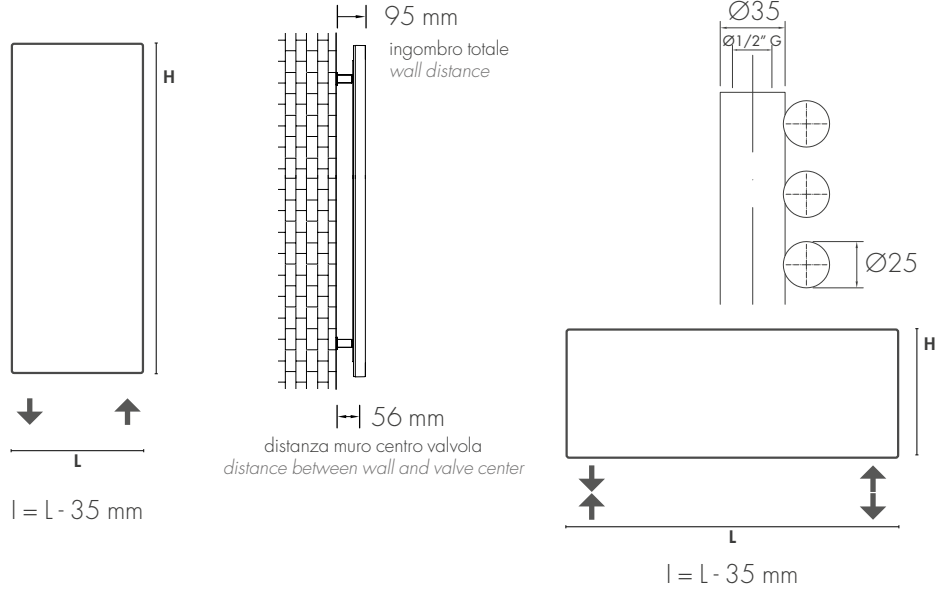

L (mm)	H (mm)	WATT Δ t50	VERSION	MODEL
400	800	380	🚰	hydraulic single
400	1200	552	🚰	hydraulic single
400	1500	716	🚰	hydraulic single
400	1800	857	🚰	hydraulic single
500	800	455	🚰	hydraulic single
500	1200	663	🚰	hydraulic single
500	1500	866	🚰	hydraulic single
500	1800	1027	🚰	hydraulic single
600	800	530	🚰	hydraulic single
600	1200	768	🚰	hydraulic single
600	1500	1016	🚰	hydraulic single
600	1800	1192	🚰	hydraulic single
700	800	605	🚰	hydraulic single
700	1200	876	🚰	hydraulic single
700	1500	1166	🚰	hydraulic single
700	1800	1359	🚰	hydraulic single
800	800	680	🚰	hydraulic single
800	1200	984	🚰	hydraulic single
800	1500	1316	🚰	hydraulic single
800	1800	1527	🚰	hydraulic single
900	800	754	🚰	hydraulic single
900	1200	1092	🚰	hydraulic single
900	1500	1466	🚰	hydraulic single
900	1800	1694	🚰	hydraulic single
1200	400	464	🚰	hydraulic single
1200	600	812	🚰	hydraulic single
1400	400	544	🚰	hydraulic single
1400	600	952	🚰	hydraulic single
1600	400	624	🚰	hydraulic single

L (mm)	H (mm)	WATT $\Delta t50$	VERSION	MODEL
1600	600	1092	🚰	hydraulic single
1800	400	696	🚰	hydraulic single
1800	600	1218	🚰	hydraulic single
L (mm)	H (mm)	WATT	VERSION	MODEL
500	1500	500	🔌	electric BASIC
500	1500	500	🔌	electric EASY1
500	1800	750	🔌	electric BASIC
500	1800	750	🔌	electric EASY1
600	1500	750	🔌	electric BASIC
600	1500	750	🔌	electric EASY1
600	1800	1000	🔌	electric BASIC
600	1800	1000	🔌	electric EASY1

BASIC



Resistenza in classe II.
Resistance in class II.

EASY 1



La versione EASY 1 elettrica.
The EASY 1 electric version includes.



Colori **FEEL** // Color **FEEL**



per richiedere altri interessi o misure personalizzate contattare
ufficio tecnico // for other valves distance or custom dimensions
please contact technical office