
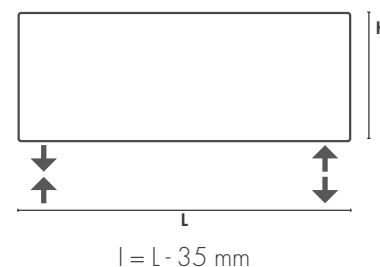
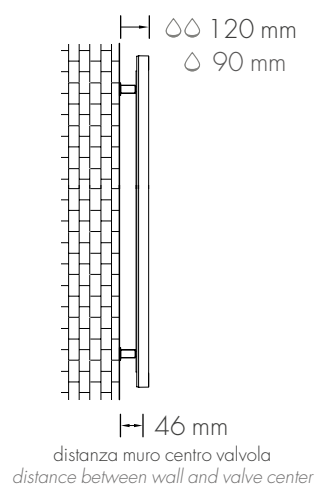


IRIDE

disponibile in versione elettrico ed idraulico
available in electric or hydraulic version

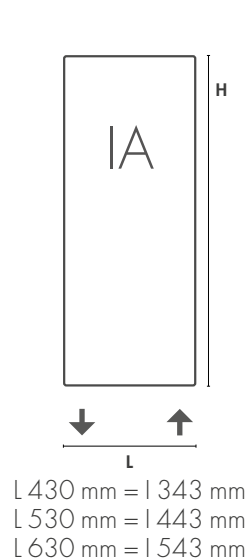

L (mm)	H (mm)	WATT $\Delta t50$	VERSION	MODEL
430	930	301	👉	hydraulic single
430	1230	402	👉	hydraulic single
430	1430	469	👉	hydraulic single
430	1830	603	👉	hydraulic single
430	2030	670	👉	hydraulic single
530	930	377	👉	hydraulic single
530	1230	502	👉	hydraulic single
530	1430	587	👉	hydraulic single
530	1830	755	👉	hydraulic single
530	2030	838	👉	hydraulic single
630	930	452	👉	hydraulic single
630	1230	603	👉	hydraulic single
630	1430	713	👉	hydraulic single
630	1830	905	👉	hydraulic single
630	2030	1010	👉	hydraulic single
430	930	472	👉👉	hydraulic double
430	1230	630	👉👉	hydraulic double
430	1430	735	👉👉	hydraulic double
430	1830	945	👉👉	hydraulic double
430	2030	1050	👉👉	hydraulic double
530	930	590	👉👉	hydraulic double
530	1230	787	👉👉	hydraulic double
530	1430	920	👉👉	hydraulic double
530	1830	1182	👉👉	hydraulic double
530	2030	1310	👉👉	hydraulic double
630	930	704	👉👉	hydraulic double
630	1230	945	👉👉	hydraulic double
630	1430	1102	👉👉	hydraulic double
630	1830	1418	👉👉	hydraulic double
630	2030	1577	👉👉	hydraulic double

living area

L (mm)	H (mm)	WATT	VERSION	MODEL
530	1430	500		electric BASIC
530	1430	500		electric EASY1
530	1430	500		electric SMART
530	1830	750		electric BASIC
530	1830	750		electric EASY1
530	1830	750		electric SMART
630	1430	750		electric BASIC
630	1430	750		electric EASY1
630	1430	750		electric SMART
630	1830	1000		electric BASIC
630	1830	1000		electric EASY1
630	1830	1000		electric SMART

BASIC



Resistenza in classe II.
Resistance in class II.

EASY 1



La versione EASY 1 elettrica.
The EASY 1 electric version includes.

SMART



Termostato e ricevitore in modalità Wireless.
Wireless thermostat and receiver.



Colori **FEEL** // Color **FEEL**



per richiedere altri interessi o misure personalizzate contattare
ufficio tecnico // for other valves distance or custom dimensions
please contact technical office