








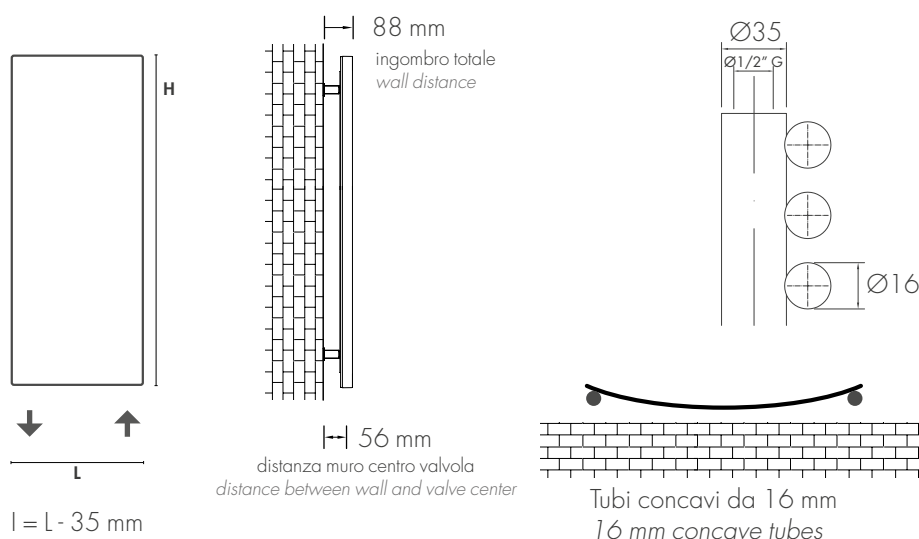

LIGEA

disponibile in versione elettrico ed idraulico
available in electric or hydraulic version

L (mm)	H (mm)	WATT $\Delta t50$	VERSION	MODEL
400	800	288	☹	hydraulic single
400	1200	417	☹	hydraulic single
400	1460	580	☹	hydraulic single
400	1830	723	☹	hydraulic single
500	800	324	☹	hydraulic single
500	1200	468	☹	hydraulic single
500	1460	648	☹	hydraulic single
500	1830	814	☹	hydraulic single
600	800	360	☹	hydraulic single
600	1200	520	☹	hydraulic single
600	1460	731	☹	hydraulic single
600	1830	920	☹	hydraulic single
700	800	397	☹	hydraulic single
700	1200	574	☹	hydraulic single
700	1460	806	☹	hydraulic single
700	1830	1009	☹	hydraulic single
800	800	432	☹	hydraulic single
800	1200	625	☹	hydraulic single
800	1460	880	☹	hydraulic single
800	1830	1085	☹	hydraulic single
900	800	468	☹	hydraulic single
900	1200	677	☹	hydraulic single
900	1460	955	☹	hydraulic single
900	1830	1190	☹	hydraulic single
1000	800	505	☹	hydraulic single
1000	1200	730	☹	hydraulic single
1000	1460	1029	☹	hydraulic single
1000	1830	1281	☹	hydraulic single

bathroom area

L (mm)	H (mm)	WATT	VERSION	MODEL
500	1460	500		electric BASIC
500	1460	500		electric EASY1
500	1830	750		electric BASIC
500	1830	750		electric EASY1
600	1460	750		electric BASIC
600	1460	750		electric EASY1
600	1830	1000		electric BASIC
600	1830	1000		electric EASY1

BASIC



Resistenza in classe II.
Resistance in class II.

EASY 1



La versione EASY 1 elettrica.
The EASY 1 electric version includes.



Colori **FEEL** // Color **FEEL**



per richiedere altri interessi o misure personalizzate contattare ufficio tecnico // for other valves distance or custom dimensions please contact technical office